A1

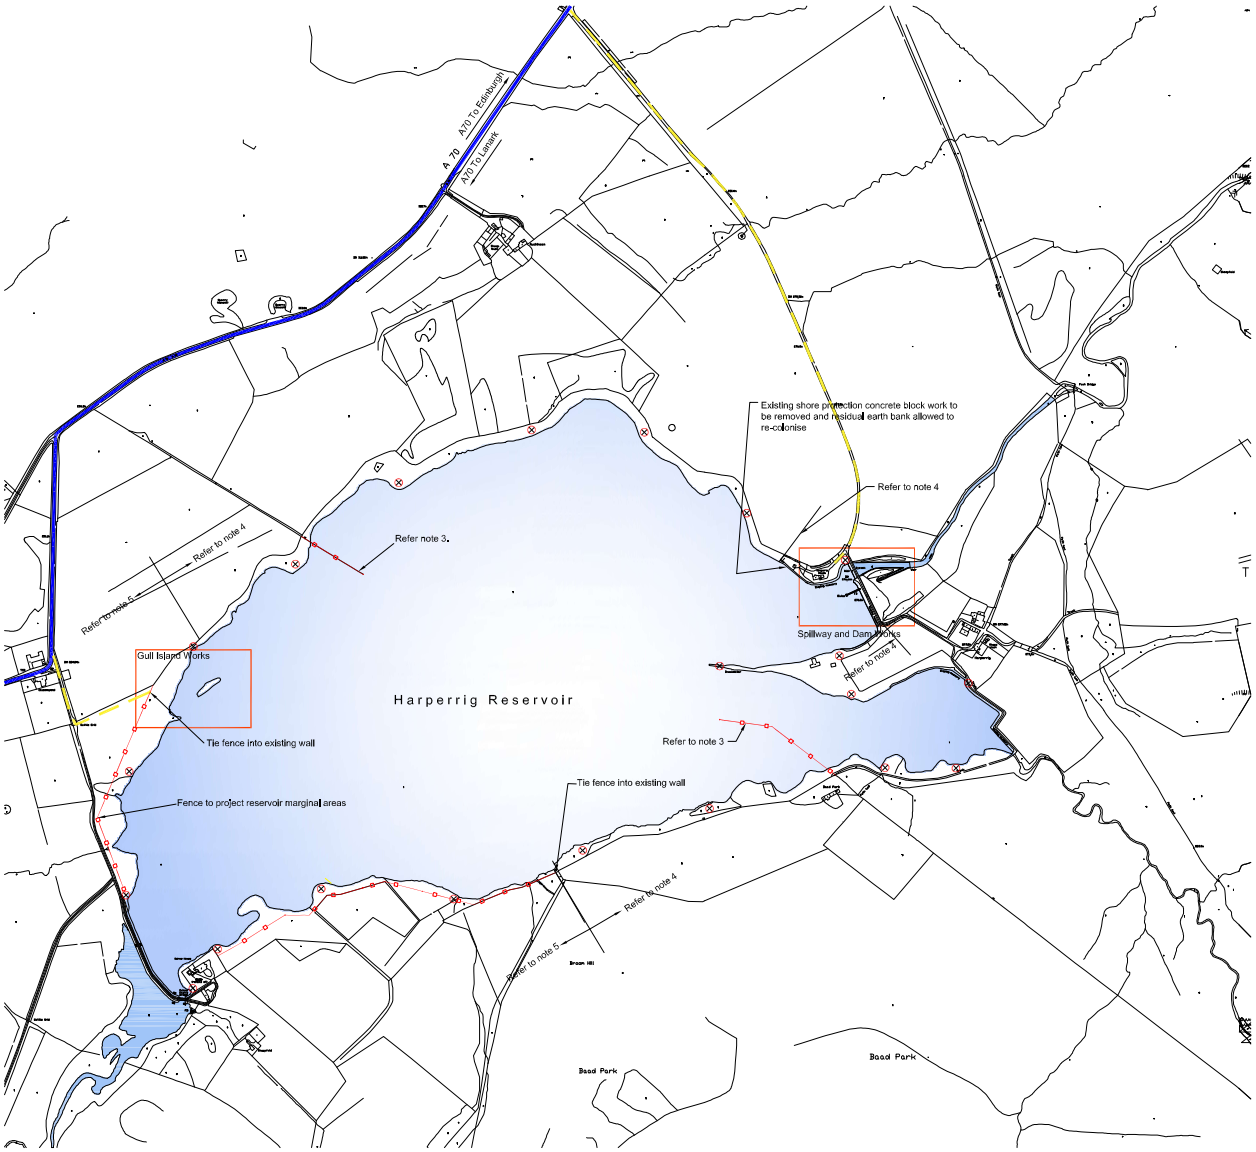

Notes

1. Contractor to undertake condition survey of the entire existing reservoir boundary dry stone dykes and fences. Required remedial works to be agreed with the Project Manager.
2. All timber posts to be per Highway Construction Details Drg.No. H15. Timber to be preserved in accordance with BS5589, Category B (20 years).
3. Erect permanent timber post and wire fence to construction draw down level (272.34m AOD). All fence posts to remain on replenishing of reservoir.
4. Gaps in existing dry stone walls and fences to be infilled with stock proof fencing to allow establishment of waterside vegetation.
5. Temporary stock proof fencing to be provided along reservoir edge. In addition troughs with water supply from Pentland springs to be provided, as agreed with supervisor and land owner.
6. Accesses to water edge to be prohibited. Location to be agreed by the Contractor with Mr Graham Hamilton of Cairns Castle.
7. Ends of reservoir side ditches to be dug out as work proceeds on erecting fences.

Legend:

- A70 Public Highway
- Possible Site Access
- Warning notices to be erected every 250m around the reservoir warning of soft ground at reservoir edge.

Issue	Date	By	Chkd	Appd
P3	23/02/06	C.D.B.	KD	

Issued for review

ARUP

Rose Wharf 78 East Street
Leeds LS9 8EE
Tel +44 (0)113 242 84081 Fax +44 (0)113 242 8673
www.arup.com

Client

EDINBVRGH
THE CITY OF EDINBURGH COUNCIL

FLOODPROTECTION

Job Title

WATER OF LEITH
FLOOD PREVENTION SCHEME

Drawing Title

HARPERRIG RESERVOIR
GENERAL PLAN

Scale at A1 1:5000

Drawing Status

FOR REVIEW

Job No	Drawing No	Issue
113245-90	HR/GEN/001	P3

© Ove Arup Partnership Ltd

J:\113000\113045\90\acad\harperrig Reservoir\HR-GEN-001.dwg 23 Feb 2006 12:44:47